



Installation of H9000 Expansion Card

Requirements:


- # 2 Phillips screwdriver
- Expansion card kit
- ¼ Hex wrench

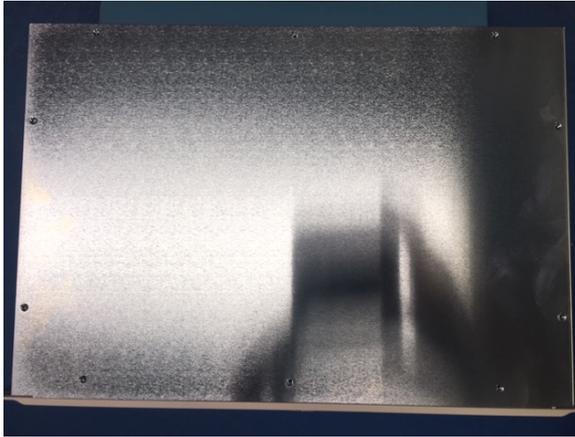


Unit should be UNPLUGGED.
Remove 10 screws from top cover

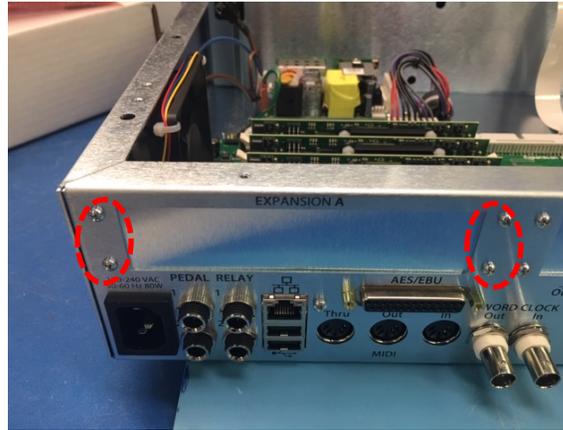


Remove 4 screws from expansion slot "A"

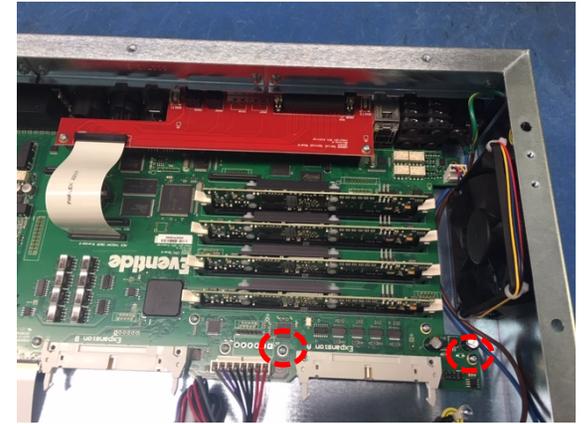

Remove 2 screws and lock washers from
motherboard

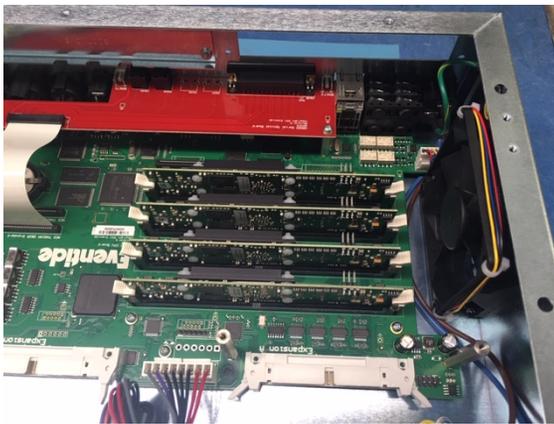

Install 2 standoffs from kit into motherboard

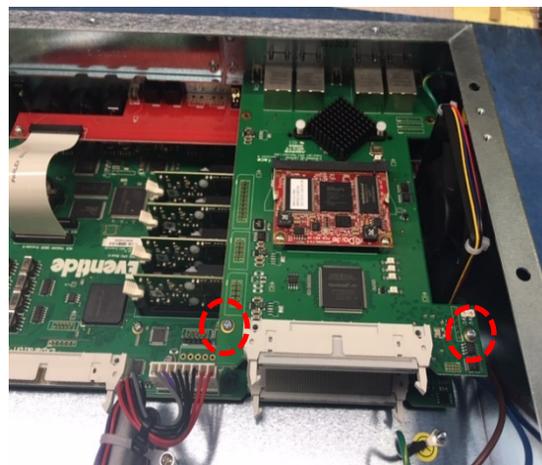

Slide expansion board into opening, attach
cable, red stripe location does not matter.
Attach lock washers and screws back into
board.



Attach 4 screws into expansion slot "A".
Install top cover back onto unit